


## 11178 Morley's Theorem

Morley's theorem states that the lines trisecting the angles of an arbitrary plane triangle meet at the vertices of an equilateral triangle. For example in the figure below the tri-sector of angles A, B and C has intersected and created an equilateral triangle DEF.

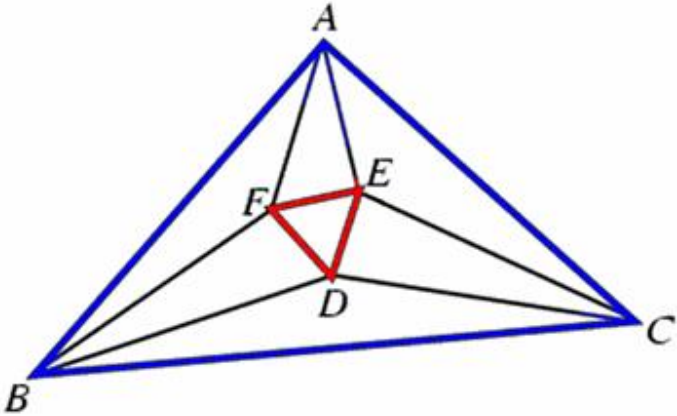

Of course the theorem has various generalizations, in particular if all of the tri-sector are intersected one obtains four other equilateral triangles. But in the original theorem only tri-sector nearest to BC are allowed to intersect to get point D, tri-sector nearest to CA are allowed to intersect point E and tri-sector nearest to AB are intersected to get point F. Tri-sector like BD and CE are not allowed to intersect. So ultimately we get only one equilateral triangle DEF. Now your task is to find the Cartesian coordinates of D, E and F given the coordinates of A, B, and C.

Trisector like BD and CE are not allowed to intersect. So ultimately we get only one equilateral triangle DEF. Now your task is to find the Cartesian coordinates of D, E and F given the coordinates of A, B, and C.

### Input

First line of the input file contains an integer  $N$  ( $0 < N < 5001$ ) which denotes the number of test cases to follow. Each of the next lines contain six integers  $X_A, Y_A, X_B, Y_B, X_C, Y_C$ . This six integers actually indicates that the Cartesian coordinates of point A, B and C are  $(X_A, Y_A), (X_B, Y_B)$  and  $(X_C, Y_C)$  respectively. You can assume that the area of triangle ABC is not equal to zero,  $0 \leq X_A, Y_A, X_B, Y_B, X_C, Y_C \leq 1000$  and the points A, B and C are in counter clockwise order.

### Output

For each line of input you should produce one line of output. This line contains six floating point numbers  $X_D, Y_D, X_E, Y_E, X_F, Y_F$  separated by a single space. These six floating-point actually means that the Cartesian coordinates of D, E and F are  $(X_D, Y_D), (X_E, Y_E), (X_F, Y_F)$  respectively. Errors less than  $10^{-5}$  will be accepted.

### Sample Input

```
2
1 1 2 2 1 2
0 0 100 0 50 50
```

### Sample Output

```
1.316987 1.816987 1.183013 1.683013 1.366025 1.633975
56.698730 25.000000 43.301270 25.000000 50.000000 13.397460
```