

## 10829 L-Gap Substrings

If a string is in the form  $UVU$ , where  $U$  is not empty, and  $V$  has exactly  $L$  characters, we say  $UVU$  is an  $L$ -Gap string. For example, **abcbabc** is a **1**-Gap string. **xyxyxyxyxy** is both a **2**-Gap string and also a **6**-Gap string, but not a **10**-Gap string (because  $U$  is non-empty).

Given a string  $s$ , and a positive integer  $g$ , you are to find the number of  $g$ -Gap substrings in  $s$ .  $s$  contains lower-case letters only, and has at most **50,000** characters.

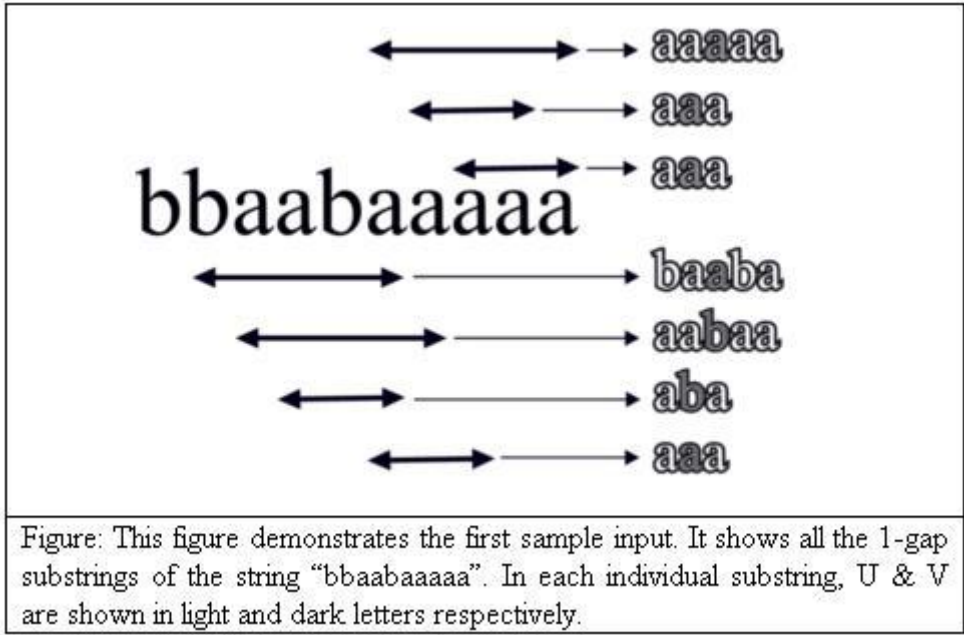


Figure: This figure demonstrates the first sample input. It shows all the 1-gap substrings of the string "bbaabaaaaa". In each individual substring, U & V are shown in light and dark letters respectively.

### Input

The first line contains a single integer  $t$  ( $1 \leq t \leq 10$ ), the number of test cases. Each of the  $t$  followings contains an integer  $g$  ( $1 \leq g \leq 10$ ) followed by a string  $s$ .

### Output

For each test case, print the case number and the number of  $g$ -Gap substrings. Look at the output for sample input for details.

### Sample Input

```
2
1 bbaabaaaaa
5 abxxxxxab
```

### Sample Output

```
Case 1: 7
Case 2: 1
```